

Electronics Engineering

Control Systems

Comprehensive Theory

with Solved Examples and Practice Questions



MADE EASY
Publications



MADE EASY Publications Pvt. Ltd.

Corporate Office: 44-A/4, Kalu Sarai (Near Hauz Khas Metro Station), New Delhi-110016

E-mail: infomep@madeeasy.in

Contact: 011-45124660, 8860378007

Visit us at: www.madeeasypublications.org

Control Systems

© Copyright, by MADE EASY Publications Pvt. Ltd.

All rights are reserved. No part of this publication may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photo-copying, recording or otherwise), without the prior written permission of the above mentioned publisher of this book.

First Edition: 2015

Second Edition: 2016

Third Edition: 2017

Fourth Edition: 2018

Fifth Edition: 2019

Sixth Edition : 2020

Seventh Edition : 2021

Eighth Edition : 2022

Contents

Control Systems

Chapter 1

Introduction	1
1.1 Open Loop Control Systems	1
1.2 Closed Loop Control Systems	2
1.3 Comparison Between Open Loop and Closed Loop Control Systems.....	3
1.4 Laplace Transformation	3

Chapter 2

Transfer Function.....	9
2.1 Transfer Function and Impulse Response Function	9
2.2 Standard Test Signals	10
2.3 Poles and Zeros of a Transfer Function.....	12
2.4 Properties of Transfer Function	13
2.5 Methods of Analysis.....	15
2.6 DC Gain for Open Loop	16
2.7 Interacting & Non-Interacting Systems.....	25
Student's Assignments-1	28
Student's Assignments-2	28

Chapter 3

Block Diagrams	33
3.1 Block Diagrams : Fundamentals.....	33
3.2 Block Diagram of a Closed-loop System.....	34
3.3 Block Diagram Transformation Theorems.....	35
Student's Assignments-1	59
Student's Assignments-2	61

Chapter 4

Signal Flow Graphs.....	65
4.1 Introduction	65
4.2 Terminology of SFG	65
4.3 Construction of Signal Flow Graphs.....	67
4.4 Mason's Gain Formula.....	69
Student's Assignments-1	86
Student's Assignments-2	88

Chapter 5

Feedback Characteristics	95
5.1 Feedback and Non-Feedback Systems.....	95
5.2 Effect of Feedback on Overall Gain.....	96
5.3 Effect of Feedback on Sensitivity.....	97
5.4 Effect of Feedback on Stability	101
5.5 Control over System Dynamics by the use of Feedback	103
5.6 Control on the Effects of the Disturbance Signals by the Use of Feedback.....	103
5.7 Effect of Noise (Disturbance) Signals.....	104
Student's Assignments-1	106
Student's Assignments-2	107

Chapter 6

Modelling of Control Systems	110
6.1 Mechanical Systems.....	110
6.2 Electrical Systems.....	112
6.3 Analogous Systems	112
6.4 Nodal Method for Writing Differential Equation of Complex Mechanical System.....	113

6.5	Gear Train	113
6.6	Servomechanism.....	118
6.7	Armature Controlled DC Servomotor	119
6.8	Field Controlled DC Servomotor	121
6.9	Two Phase AC Servomotor	122
6.10	Potentiometer	125
6.11	Tachometers.....	126
6.12	Synchro	127
6.13	Position Control System.....	131
	<i>Student's Assignments-1</i>	134
	<i>Student's Assignments-2</i>	136

Chapter 7

Time Domain Analysis

of Control Systems.....142

7.1	Introduction	142
7.2	Transient and Steady State Response.....	142
7.3	Steady State Error.....	144
7.4	Static Error Coefficients.....	145
7.5	Dynamic (or generalised) Error Coefficients...	155
7.6	Relationship between Static and Dynamic Error Constants.....	156
7.7	Transients State Analysis	160
7.8	Dominant Poles of Transfer Functions.....	198
	<i>Student's Assignments-1</i>	208
	<i>Student's Assignments-2</i>	217

Chapter 8

Stability Analysis of Linear

Control Systems222

8.1	The Concept of Stability	222
	<i>Student's Assignments-1</i>	244
	<i>Student's Assignments-2</i>	246

Chapter 9

The Root Locus Technique251

9.1	Introduction	251
9.2	Angle and Magnitude Conditions.....	252
9.3	Construction Rules of Root Locus	253

9.4	Gain Margin and Phase Margin from Root Locus Plot.....	263
9.5	Effects of Adding Poles and Zeros to $G(s)$ $H(s)$	278
9.6	Complementary Root Locus (CRL) or Inverse Root Locus (IRL)	279
	<i>Student's Assignments-1</i>	282
	<i>Student's Assignments-2</i>	285

Chapter 10

Frequency Domain Analysis

of Control Systems.....292

10.1	Introduction	292
10.2	Advantages of Frequency Response.....	292
10.3	Frequency Response Analysis of Second Order Control System.....	293
10.4	Frequency-Domain Specifications.....	295
10.5	Correlation between Step Response & Frequency Response in the Standard Order System.....	297
10.6	Frequency Domain Analysis of Dead Time or Transportation Lag Elements.....	300
10.7	Relative Stability: Gain Margin and Phase Margin	302
10.8	Gain Margin and Phase Margin for Second Order Control System.....	303
10.9	Graphical Methods of Frequency Domain Analysis.....	310
10.10	Polar Plots	310
10.11	Stability from Polar Plots	318
10.12	Effect of (Open Loop) Gain on Stability.....	320
10.13	Gain Phase Plot	320
10.14	Theory of Nyquist Criterion	322
10.15	Bode Plots.....	340
10.16	Basic Factors of $G(j\omega)$ $H(j\omega)$	341
10.17	General Procedure for Constructing the Bode Plots	347
	<i>Student's Assignments-1</i>	358
	<i>Student's Assignments-2</i>	363

Chapter 11

Industrial Controllers

and Compensators368

11.1	Introduction to Compensators.....	368
11.2	Lead Compensator	369
11.3	Lag Compensator.....	370
11.4	Lag-Lead Compensator.....	371
11.5	Comparison of Lead and Lag Compensators...	372
11.6	Bode Plot for Lag Lead Compensator	373
11.7	Industrial Controllers	380
11.8	Proportional (P) Controller.....	380
11.9	Integral (I) Controller (Reset Mode)	381
11.10	Derivative (D) Controller (Rate Mode)	383
11.11	Proportional Integral (P-I) Controller	384
11.12	Proportional Derivative (P-D) Controller.....	385

11.13	Proportional Integral Derivative (P-I-D)
-------	--

Controller	386
------------------	-----

11.14	Op-Amp Based Realisation of Controllers.....	386
-------	--	-----

<i>Student's Assignments-1</i>	394
--------------------------------------	-----

<i>Student's Assignments-2</i>	395
--------------------------------------	-----

Chapter 12

State Variable Analysis398

12.1	Introduction	398
------	--------------------	-----

12.2	State Space Representation of Control System.....	398
------	--	-----

12.3	Solution of State Equations	413
------	-----------------------------------	-----

12.4	Controllability and Observability	423
------	---	-----

<i>Student's Assignments-1</i>	429
--------------------------------------	-----

<i>Student's Assignments-2</i>	432
--------------------------------------	-----



Introduction

Control System:

Control system is a means by which any quantity of interest in a machine, mechanism or other equipment is maintained or altered in accordance with a desired manner.

Control system can also be defined as the combination of elements arranged in a planned manner wherein each element causes an effect to produce a desired output.

Control systems are classified into two general categories as Open-loop and close-loop systems.

1.1 Open Loop Control Systems

An open loop control system is one in which the control action is independent of the output.




Figure-1.1: Open-loop control system

This is the simplest and most economical type of control system and does not have any feedback arrangement.

Some common examples of open-loop control systems are

- (a) Traffic light controller
- (b) Electric washing machine
- (c) Automatic coffee server
- (d) Bread toaster

Advantages of Open Loop Control Systems

- (a) Simple and economic
- (b) No stability problem

Disadvantages of Open Loop Control Systems

- (a) Inaccurate
- (b) Unrealisable
- (c) The effect of parameter variation and external noise is more

Note: Open loop control systems does not require performance analysis.

1.2 Closed Loop Control Systems

A *closed loop control system* is one in which the control action is some how dependent on the output.

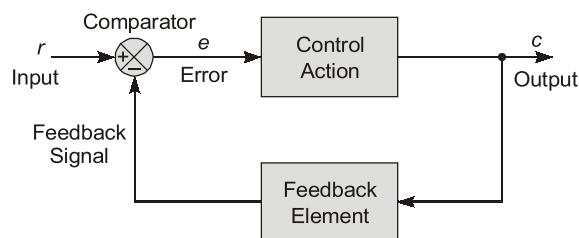


Figure-1.2: Closed loop control system

The closed loop system has same basic features as of open loop system with an additional feedback feature. The actual output is measured and a signal corresponding to this measurement is feedback to the input section, where it is with the input to obtain the desired output.

Some common examples of closed loop control systems are:

- Electric iron
- DC motor speed control
- A missile launching system (direction of missile changes with the location of moving target)
- Radar tracking system
- Human respiratory system
- Autopilot system
- Economic inflation

Advantages of Closed Loop Control Systems

- Accurate and reliable
- Reduced effect of parameter variation
- Bandwidth of the system can be increased with negative feedback
- Reduced effect of non-linearities

Disadvantages of Closed Loop Control Systems

- The system is complex and costly
- System may become unstable
- Gain of the system reduces with negative feedback

Remember



- Feedback is not used for improving stability
- An open loop stable system may also become unstable when negative feedback is applied
- Except oscillators, in positive feedback, we have always unstable systems.

1.3 Comparison Between Open Loop and Closed Loop Control Systems

Open Loop System	Closed Loop System
1. So long as the calibration is good, open-loop system will be accurate	1. Due to feedback, the close-loop system is more accurate
2. Organization is simple and easy to construct	2. Complicated and difficult
3. Generally stable in operation	3. Stability depends on system components
4. If non-linearity is present, system operation degenerates	4. Comparatively, the performance is better than open-loop system if non-linearity is present

Example-1.1

Match List-I (Physical action or activity) with List-II (Category of system)

and select the correct code:

List-I

- A. Human respiration system
- B. Pointing of an object with a finger
- C. A man driving a car
- D. A thermostatically controlled room heater

List II

- 1. Man-made control system
- 2. Natural including biological control system
- 3. Control system whose components are both man-made and natural

Codes:

	A	B	C	D
(a)	2	2	3	1
(b)	3	1	2	1
(c)	3	2	2	3
(d)	2	1	3	3

Solution: (a)

1.4 Laplace Transformation

In order to transform a given function of time $f(t)$ into its corresponding Laplace transform first multiply $f(t)$ by e^{-st} , s being a complex number ($s = \sigma + j\omega$). Integrate this product with respect to time with limits from zero to ∞ . This integration results in Laplace transform of $f(t)$, which is denoted by $F(s)$ or $\mathcal{L}[f(t)]$.

The mathematical expression for Laplace transform is,

$$\mathcal{L}[f(t)] = F(s), t \geq 0$$

where,

$$F(s) = \int_0^{\infty} f(t) \cdot e^{-st} dt$$

The original time function $f(t)$ is obtained back from the Laplace transform by a process called inverse Laplace transformation and denoted as \mathcal{L}^{-1}

Thus, $\mathcal{L}^{-1}[\mathcal{L}[f(t)]] = \mathcal{L}^{-1}[F(s)] = f(t)$

The time function $f(t)$ and its Laplace transform $F(s)$ form a transform pair.

S.No.	$f(t)$	$F(s) = \mathcal{L}[f(t)]$
1.	$\delta(t)$ unit impulse at $t = 0$	1
2.	$u(t)$ unit step at $t = 0$	$\frac{1}{s}$
3.	$u(t - T)$ unit step at $t = T$	$\frac{1}{s} e^{-sT}$
4.	t	$\frac{1}{s^2}$
5.	$\frac{t^2}{2}$	$\frac{1}{s^3}$
6.	t^n	$\frac{n!}{s^{n+1}}$
7.	e^{at}	$\frac{1}{s - a}$
8.	e^{-at}	$\frac{1}{s + a}$
9.	$t e^{at}$	$\frac{1}{(s - a)^2}$
10.	$t e^{-at}$	$\frac{1}{(s + a)^2}$
11.	$t^n e^{-at}$	$\frac{n!}{(s + a)^{n+1}}$
12.	$\sin \omega t$	$\frac{\omega}{s^2 + \omega^2}$
13.	$\cos \omega t$	$\frac{s}{s^2 + \omega^2}$

Table-1.1 Table of Laplace Transform Pairs

Basic Laplace Transform Theorems

Basic theorems of Laplace transform are given below:

(a) Laplace Transform of Linear Combination:

$$\mathcal{L}[af_1(t) + bf_2(t)] = aF_1(s) + bF_2(s)$$

where $f_1(t)$, $f_2(t)$ are functions of time and a , b are constants.

(b) If the Laplace Transform of $f(t)$ is $F(s)$, then:

$$(i) \quad \mathcal{L}\left[\frac{df(t)}{dt}\right] = [sF(s) - f(0^+)]$$

$$(ii) \quad \mathcal{L}\left[\frac{d^2f(t)}{dt^2}\right] = [s^2F(s) - sf(0^+) - f'(0^+)]$$

$$(iii) \quad \mathcal{L}\left[\frac{d^3f(t)}{dt^3}\right] = [s^3F(s) - s^2f(0^+) - sf'(0^+) - f''(0^+)]$$

where $f(0^+)$, $f'(0^+)$, $f''(0^+)$... are the values of $f(t)$, $\frac{df(t)}{dt}$, $\frac{d^2f(t)}{dt^2}$... at $t = (0^+)$.

(c) If the Laplace Transform of $f(t)$ is $F(s)$, then:

$$(i) \quad \mathcal{L}\left[\int f(t)\right] = \left[\frac{F(s)}{s} + \frac{f^{-1}(0^+)}{s}\right]$$

$$(ii) \quad \mathcal{L}\left[\int\int f(t)\right] = \left[\frac{F(s)}{s^2} + \frac{f^{-1}(0^+)}{s^2} + \frac{f^{-2}(0^+)}{s}\right]$$

$$(iii) \quad \mathcal{L}\left[\int\int\int f(t)\right] = \left[\frac{F(s)}{s^3} + \frac{f^{-1}(0^+)}{s^3} + \frac{f^{-2}(0^+)}{s^2} + \frac{f^{-3}(0^+)}{s}\right]$$

where $f^{-1}(0^+)$, $f^{-2}(0^+)$, $f^{-3}(0^+)$... are the values of $\int f(t)$, $\int\int f(t)$, $\int\int\int f(t)$... at $t = (0^+)$.

(d) If the Laplace Transform of $f(t)$ is $F(s)$, then:

$$\mathcal{L}[e^{\pm at} f(t)] = F(s \mp a)$$

(e) If the Laplace Transform of $f(t)$ is $F(s)$, then:

$$\mathcal{L}[t f(t)] = -\frac{d}{ds} F(s)$$

(f) Initial Value Theorem:

$$\lim_{t \rightarrow 0} f(t) = \lim_{s \rightarrow \infty} s \mathcal{L}[f(t)]$$

or

$$\lim_{t \rightarrow 0} f(t) = \lim_{s \rightarrow \infty} s F(s)$$

(g) Final Value Theorem:

$$\lim_{t \rightarrow \infty} f(t) = \lim_{s \rightarrow 0} s \mathcal{L}[f(t)]$$

or

$$\lim_{t \rightarrow \infty} f(t) = \lim_{s \rightarrow 0} s F(s)$$

The final value theorem gives the final value ($t \rightarrow \infty$) of a time function using its Laplace transform and as such very useful in the analysis of control systems. However, if the denominator of $sF(s)$ has any root having real part as zero or positive, then the final value theorem is not valid.

Example-1.2

Laplace transform of $\sin(\omega t + \alpha)$ is

$$(a) \quad \frac{s \cos \alpha + \omega \sin \alpha}{s^2 + \omega^2}$$

$$(b) \quad \frac{\omega}{s^2 + \omega^2} \cos \alpha$$

$$(c) \quad \frac{s}{s^2 + \omega^2} \sin \alpha$$

$$(d) \quad \frac{s \sin \alpha + \omega \cos \alpha}{s^2 + \omega^2}$$

Solution:(d)

$$\sin(\omega t + \alpha) = \sin \omega t \cos \alpha + \cos \omega t \sin \alpha$$

$$\begin{aligned} \mathcal{L}\{\sin(\omega t + \alpha)\} &= \frac{\omega \cos \alpha}{s^2 + \omega^2} + \frac{s \sin \alpha}{s^2 + \omega^2} \\ &= \frac{s \sin \alpha + \omega \cos \alpha}{s^2 + \omega^2} \end{aligned}$$

Example-1.3

Given $\mathcal{L}[f(t)] = F(s) = \int_0^{\infty} f(t) e^{-st} dt$, which of the following expressions are correct?

1. $\mathcal{L}\{f(t-a) u(t-a)\} = F(s)e^{-sa}$
2. $\mathcal{L}\{t f(t)\} = \frac{-dF(s)}{ds}$
3. $\mathcal{L}\{(t-a)f(t)\} = as F(s)$
4. $\mathcal{L}\left\{\frac{df(t)}{dt}\right\} = sF(s) - f(0^+)$

Select the correct answer using the codes given below

- (a) 1, 2 and 3 (b) 1, 2 and 4
(c) 2, 3 and 4 (d) 1, 3 and 4

Solution: (b)

These are the properties of Laplace transform.

Example-1.4

Match List-I [Function in time domain $f(t)$] with List-II [Property] and select the correct answer using the code given below the lists:

List-I

List-II

A. $\sin \omega_0 t u(t-t_0)$

1. $\frac{\omega_0}{s^2 + \omega_0^2}$

B. $\sin \omega_0(t-t_0) u(t-t_0)$

2. $\left\{ \frac{\omega_0}{s^2 + \omega_0^2} \right\} e^{-t_0 s}$

C. $\sin \omega_0(t-t_0) u(t)$

3. $\frac{e^{-t_0 s}}{\sqrt{s^2 + \omega_0^2}} \sin\left(\omega_0 t_0 + \tan^{-1} \frac{\omega_0}{s}\right)$

D. $\sin \omega_0 t u(t)$

4. $-\frac{1}{\sqrt{s^2 + \omega_0^2}} \sin\left(\omega_0 t_0 - \tan^{-1} \frac{\omega_0}{s}\right)$

Codes:

- | | | | | |
|-----|---|---|---|---|
| | A | B | C | D |
| (a) | 3 | 1 | 4 | 2 |
| (b) | 4 | 2 | 3 | 1 |
| (c) | 3 | 2 | 4 | 1 |
| (d) | 4 | 1 | 3 | 2 |

Solution: (c)

Example-1.5

Find the inverse Laplace transform of the following functions:

(i) $F(s) = \frac{s+2}{s^2 + 4s + 6}$

(ii) $F(s) = \frac{5}{s(s^2 + 4s + 5)}$

(iii) $F(s) = \frac{s^2 + 2s + 3}{s^3 + 6s^2 + 12s + 8}$

Solution:

(i) $F(s) = \frac{s+2}{s^2 + 4s + 6}$

\therefore The term $(s^2 + 4s + 6)$ can be expressed as $[(s+2)^2 + (\sqrt{2})^2]$

$$\therefore F(s) = \frac{s+2}{(s+2)^2 + (\sqrt{2})^2}$$

Taking inverse Laplace transform on both sides

$$\mathcal{L}^{-1} F(s) = \mathcal{L}^{-1} \frac{s+2}{(s+2)^2 + (\sqrt{2})^2}$$

$$\therefore f(t) = e^{-2t} \cos \sqrt{2}t$$

$$(ii) \quad F(s) = \frac{5}{s(s^2 + 4s + 5)}$$

Using partial fraction expansion,

$$\frac{5}{s(s^2 + 4s + 5)} = \frac{A}{s} + \frac{Bs + C}{s^2 + 4s + 5}$$

The coefficients are determined as $A = 1$, $B = -1$ and $C = -4$

$$\therefore F(s) = \frac{1}{s} - \frac{s+4}{s^2 + 4s + 5}$$

\therefore The term $(s^2 + 4s + 5)$ can be expressed as $[(s+2)^2 + (1)^2]$

$$\therefore F(s) = \frac{1}{s} - \frac{s+2}{[(s+2)^2 + (1)^2]} - 2 \frac{1}{[(s+2)^2 + (1)^2]}$$

Taking inverse Laplace transform on both sides

$$\mathcal{L}^{-1} F(s) = \mathcal{L}^{-1} \left[\frac{1}{s} - \frac{s+2}{(s+2)^2 + (1)^2} - 2 \frac{1}{(s+2)^2 + (1)^2} \right]$$

$$\text{or} \quad \mathcal{L}^{-1} F(s) = \mathcal{L}^{-1} \frac{1}{s} - \mathcal{L}^{-1} \frac{s+2}{[(s+2)^2 + (1)^2]} - \mathcal{L}^{-1} 2 \frac{1}{[(s+2)^2 + (1)^2]}$$

$$\therefore f(t) = (1 - e^{-2t} \cos t - 2e^{-2t} \sin t)$$

$$(iii) \quad F(s) = \frac{s^2 + 2s + 3}{s^3 + 6s^2 + 12s + 8}$$

\therefore The denominator $(s^3 + 6s^2 + 12s + 8)$ can be expressed as $(s+2)^3$

$$\therefore F(s) = \frac{s^2 + 2s + 3}{(s+2)^3}$$

Using partial fraction expansion

$$F(s) = \frac{A}{(s+2)} + \frac{B}{(s+2)^2} + \frac{C}{(s+2)^3}$$

The coefficients are determined as $A = 1$, $B = -2$ and $C = 3$

$$\therefore F(s) = \frac{1}{s+2} - \frac{2}{(s+2)^2} + \frac{3}{(s+2)^3}$$

Taking inverse Laplace transform on both sides

$$\mathcal{L}^{-1} F(s) = \mathcal{L}^{-1} \left[\frac{1}{s+2} - \frac{2}{(s+2)^2} + \frac{3}{(s+2)^3} \right]$$

$$\text{or} \quad \mathcal{L}^{-1} F(s) = \mathcal{L}^{-1} \frac{1}{s+2} - \mathcal{L}^{-1} \frac{2}{(s+2)^2} + \mathcal{L}^{-1} \frac{3}{(s+2)^3}$$

$$\therefore f(t) = e^{-2t} - 2t e^{-2t} + \frac{3}{2} t^2 e^{-2t}$$

$$\text{or } f(t) = e^{-2t} \left[1 - t \left(2 - \frac{3}{2} t \right) \right]$$

Example-1.6

$F(s) = \frac{(1 - e^{-sT})}{s}$ is the Laplace transform of




- (a) a pulse of width T (b) a square wave of period T
 (c) a unit step delayed by T (d) a ramp delayed by T

Solution:(a)

$$F(s) = \frac{1 - e^{-sT}}{s}$$

$$= \frac{1}{s} - e^{-sT} \left(\frac{1}{s} \right)$$

$$\therefore f(t) = u(t) - u(t - T)$$

**Example-1.7**

Consider the rational function

$$F(s) = \frac{1}{(s+1)^2 (s+2)}$$

find $f(t)$.

Solution:

The partial fraction expansion of $F(s)$ is

$$F(s) = A + \frac{B}{s+1} + \frac{C}{(s+1)^2} + \frac{D}{s+2}$$

The coefficients A, B, C, D are given by

$$A = 0$$

$$B = \left. \frac{d}{ds} (s+1)^2 F(s) \right|_{s=-1} = \left. \frac{d}{ds} \left(\frac{1}{s+2} \right) \right|_{s=-1} = -1$$

$$C = \left. (s+1)^2 F(s) \right|_{s=-1} = \left. \frac{1}{s+2} \right|_{s=-1} = 1$$

$$D = \left. (s+2) F(s) \right|_{s=-2} = 1$$

Thus,

$$F(s) = -\frac{1}{s+1} + \frac{1}{(s+1)^2} + \frac{1}{s+2}$$

\Rightarrow

$$f(t) = -e^{-t} u(t) + e^{-t} t u(t) + e^{-2t} u(t)$$

■■■■

Transfer Function

2.1 Transfer Function and Impulse Response Function

In control theory, transfer functions are commonly used to characterise the input-output relationships of components or systems that can be described by linear, time-invariant differential equations.

Transfer Function

The transfer function of a linear, time-invariant, differential equation system is defined as the ratio of the Laplace transform of the output (response function) to the Laplace transform of the input (driving function) under the assumption that all initial conditions are zero.

Linear Systems

A system is called linear if the principle of superposition and principle of homogeneity apply. The principle of superposition states that the response produced by the simultaneous application of two different forcing functions is the sum of the two individual responses. Hence, for the linear system, the response to several inputs can be calculated by transferring one input at a time and adding the results. It is the principle that allows one to build up complicated solutions to the linear differential equations from simple solutions.

In an experimental investigation of a dynamic system, if cause and effect are proportional, thus implying that the principle of superposition holds, then the system can be considered as linear.

Linear Time-Invariant Systems and Linear-Time Varying Systems

A differential equation is linear if the coefficients are constants or functions only of the independent variable. Dynamic systems that are composed of linear time-invariant lumped-parameter components may be described by linear time-invariant differential equations i.e. constant-coefficient differential equations. Such systems are called linear time-invariant (or linear constant-coefficient) systems. Systems that are represented by differential equations whose coefficients are function of time are called linear time varying systems. An example of a time-varying control system is a space craft control system (the mass of a space craft changes due to fuel consumption).

The definition of transfer function is easily extended to a system with multiple inputs and outputs (i.e. a multivariable system). In a multivariable system, a linear differential equation may be used to describe the relationship between a pair of input and output variables, when all other inputs are set to zero. Since the principle of superposition is valid for linear systems, the total effect (on any output) due to all the inputs acting simultaneously is obtained by adding up the outputs due to each input acting alone.

Example-2.1

When deriving the transfer function of a linear element

- (a) both initial conditions and loading are taken into account
- (b) initial conditions are taken into account but the element is assumed to be not loaded.
- (c) initial conditions are assumed to be zero but loading is taken into account
- (d) initial conditions are assumed to be zero and the element is assumed to be not loaded.

Solution: (c)

While deriving the transfer function of a linear element only initial conditions are assumed to be zero, loading (or input) can't assume to be zero.

Example-2.2

If the initial conditions for a system are inherently zero, what does it physically

mean?

- (a) The system is at rest but stores energy
- (b) The system is working but does not store energy
- (c) The system is at rest or no energy is stored in any of its part
- (d) The system is working with zero reference input

Solution: (c)

A system with zero initial conditions is said to be at rest since there is no stored energy.

Example-2.3

What are the properties of linear systems not valid for non-linear systems?

Explain each briefly?

Solution:

- Linear systems satisfy properties of superposition and homogeneity. Any system that does not satisfy these properties is non-linear.

Property of superposition: When the output corresponding to V_{in1} is V_{out1} and the output corresponding to V_{in2} is V_{out2} then the output corresponding to $aV_{in1} + bV_{in2}$ is $aV_{out1} + bV_{out2}$.

Property of homogeneity: It states that for a given input x in the domain of the function f and for any real number k

$$f(kx) = kf(x)$$

- Linear systems have one equilibrium point at the origin. Non-linear systems may have many equilibrium points.

2.2 Standard Test Signals

1. Step Signal


$$r(t) = A u(t)$$

where,

$$u(t) = \begin{cases} 1, & t > 0 \\ 0, & t < 0 \end{cases}$$

Laplace transform,

$$R(s) = A/s$$




2. Ramp Signal

$$r(t) = \begin{cases} A t & t > 0 \\ 0 & t < 0 \end{cases}$$

Laplace transform,

$$R(s) = A/s^2$$




3. Parabolic Signal

$$r(t) = \begin{cases} A t^2 / 2, & t > 0 \\ 0 & t < 0 \end{cases}$$

Laplace transform,

$$R(s) = A/s^3$$



4. Impulse Signal

$$r(t) = \begin{cases} \infty, & t = 0 \\ 0, & t \neq 0 \end{cases} ; \int_{-\infty}^{+\infty} \delta(t) dt = 1$$

Laplace transform,

$$R(s) = 1$$

Transfer function,


$$G(s) = \frac{C(s)}{R(s)}$$

$$C(s) = F(s) R(s)$$

Let,

$$R(s) = \text{Impulse signal} = 1$$

$$C(s) = \text{Impulse response} = G(s) \times 1 = \text{T.F.}$$



$$\mathcal{L}\{\text{Impulse Response}\} = \text{Transfer function} = \left[\frac{C(s)}{R(s)} \right]$$

NOTE



- d/dt (Parabolic Response) = Ramp Response
- d/dt (Ramp Response) = Step Response
- d/dt (Step Response) = Impulse Response

Consider, a linear time-invariant system has the input $u(t)$ and output $y(t)$. The system can be characterized by its impulse response $g(t)$, which is defined as the output when the input is a unit-impulse function $\delta(t)$. Once the impulse response of a linear system is known, the output of the system $y(t)$, with any input $u(t)$, can be found by using the transfer function.

Let $G(s)$ denotes the transfer function of a system with input $u(t)$, output $y(t)$, and impulse response $g(t)$. The transfer function $G(s)$ is defined as

$$G(s) = \mathcal{L}[g(t)] = \frac{\mathcal{L}[y(t)]}{\mathcal{L}[u(t)]} \Big|_{\text{initial conditions} \rightarrow 0} = \frac{Y(s)}{U(s)}$$

Remember



Sometimes, students do a common mistake, they first find $y(t)/u(t)$ and then take its Laplace transform to determine the transfer function which is absolutely wrong. Because,

$$G(s) = \frac{Y(s)}{U(s)} = \frac{\mathcal{L}[y(t)]}{\mathcal{L}[u(t)]} \neq \mathcal{L}\left[\frac{y(t)}{u(t)}\right]$$

⇒ On the otherhand, a transfer function which has one or more zeros in the right half of s-plane is known as “**non-minimum phase transfer function**”.


Let
$$G_1(s) = \frac{1 + sT_1}{1 + sT_2}$$

⇒
$$G_1(j\omega) = \frac{1 + j\omega T_1}{1 + j\omega T_2} \quad \dots(i)$$


and
$$G_2(j\omega) = \frac{1 - j\omega T_1}{1 + j\omega T_2} \quad \dots(ii)$$

The transfer function given by equation (i) represents the minimum-phase transfer function and equation (ii) represents the non-minimum phase transfer function .

⇒ The pole-zero configuration of above transfer function as given by equation (i) and (ii) may be drawn as:

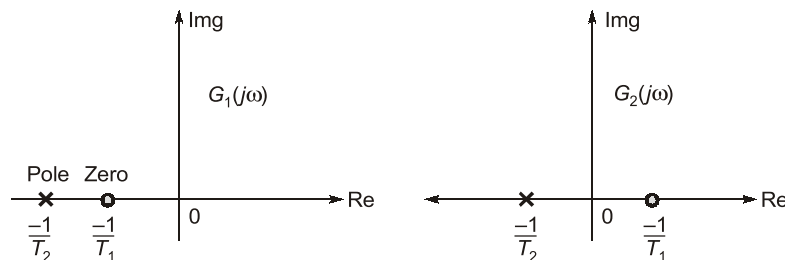

⇒ The **minimum phase function** has unique relationship between its phase and magnitude curves. Typical phase angle characteristics are shown below:

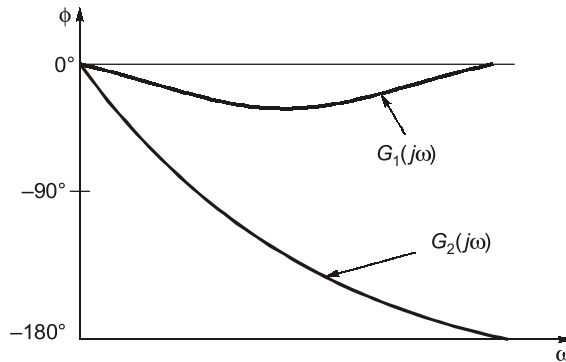

⇒ It will be seen that larger the phase lags present in a system, the more complex are its stabilization problems. Therefore in control systems, elements with non minimum phase transfer function are avoided as far as possible.


⇒ A common example of a non-minimum phase system is “**transportation lag**” which has the transfer function,

$$\begin{aligned} G(j\omega) &= e^{-j\omega T} = 1 \angle -\omega T \text{ Radian} \\ &= 1 \angle -57.3 \omega T \text{ degree} \end{aligned}$$

Student's
Assignments

1

- Q.1 A feedback control system is shown below . Find the transfer function for this system.

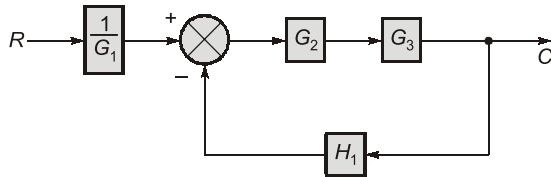


- Q.2 The step response of a system is given as

$$y = 1 - \frac{7}{3}e^{-t} + \frac{3}{2}e^{-2t} - \frac{1}{6}e^{-4t}$$

function of this system is $\frac{(s+a)}{(s+b)(s+c)(s+d)}$
then $a + b + c + d$ is _____.

- Q.3 A system has the transfer function $\frac{(1-s)}{(1+s)}$. Its gain at $\omega = 1$ rad/sec is _____.

- Q.4 The close loop gain of the system shown below is

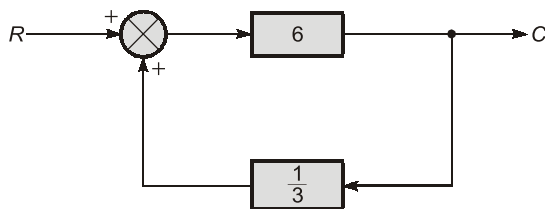Student's
Assignments

1

Explanations

$$1. \left(\frac{G_2 G_3}{G_1 (1 + H_1 G_2 G_3)} \right)$$

Multiply G_2 and G_3 and apply feedback formula
and then again multiply with $\frac{1}{G_1}$

$$T(s) = \frac{G_2 G_3}{G_1 (1 + G_2 G_3 H_1)}$$

2. (15)

$$y = 1 - \frac{7}{3}e^{-t} + \frac{3}{2}e^{-2t} - \frac{1}{6}e^{-4t}$$

$$p(t) = \frac{dy}{dt}$$

$$= \frac{7}{3}e^{-t} + \frac{3}{2} \times (-2) \times e^{-2t} - \left(\frac{1}{6} \right) (-4) e^{-4t}$$

Laplace transform of $p(t)$

$$p(s) = \frac{7/3}{s+1} + \frac{-3}{s+2} + \frac{2/3}{s+4}$$

$$= \frac{s+8}{(s+1)(s+2)(s+4)}$$

$$\Rightarrow a + b + c + d = 15$$

3. (1)

For all pass system, gain = '1' at all frequencies.


4. (-6)

$$\text{C.L.T.F.} = \frac{6}{1-6 \times \frac{1}{3}} = \frac{6}{-1} = -6$$

Student's
Assignments

2

- Q.1 For the following system,

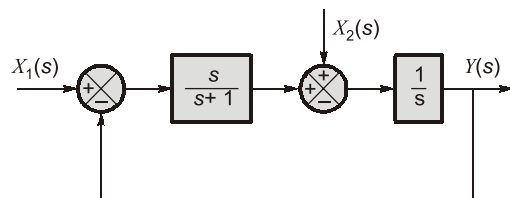

when $X_1(s) = 0$, the transfer function $\frac{Y(s)}{X_2(s)}$ is


(a) $\frac{s+1}{s^2}$

(b) $\frac{1}{s+1}$


(c) $\frac{s+2}{s(s+1)}$

(d) $\frac{s+1}{s(s+2)}$

Q.2 If closed-loop transfer function poles shown below

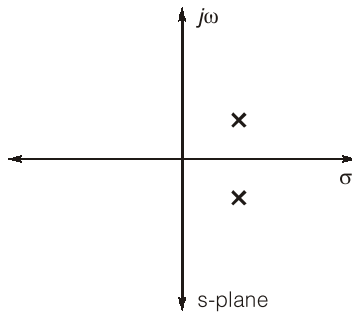

Impulse response is

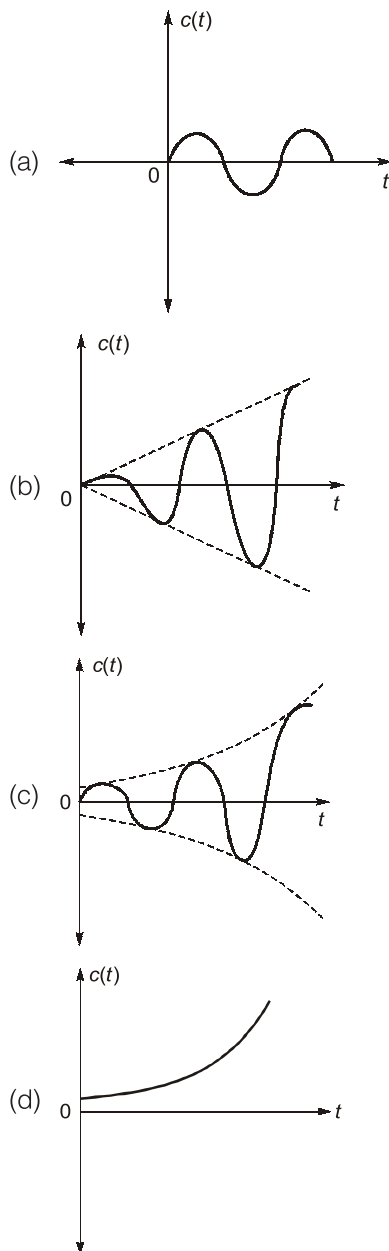

Q.3 The impulse response of several continuous systems are given below. Which is/are stable?

1. $h(t) = te^{-t}$

2. $h(t) = 1$

3. $h(t) = e^{-t} \sin 3t$

4. $h(t) = \sin \omega t$

(a) 1 only

(b) 1 and 3

(c) 3 and 4

(d) 2 and 4

Q.4 Ramp response of the transfer function

$$F(s) = \frac{s+1}{s+2}$$
 is

(a) $\frac{1}{4} - \frac{1}{4}e^{-2t} + \frac{1}{2}t$

(b) $\frac{1}{4}e^{-2t} + \frac{1}{4} + \frac{1}{2}t$

(c) $\frac{1}{2} - \frac{1}{2}e^{-2t} + t$

(d) $\frac{1}{2}e^{-2t} + \frac{1}{2} - t$

Q.5 Which of the following statements are correct?

1. Transfer function can be obtained from the signal flow graph of the system.

2. Transfer function typically characterizes to linear time invariant systems.

3. Transfer function gives the ratio of output to input in frequency domain of the system.

(a) 1 and 2

(b) 2 and 3

(c) 1 and 3

(d) 1, 2 and 3

Q.6 Which of the following is not a desirable feature of a modern control system?

(a) Quick response

(b) Accuracy

(c) Correct power level

(d) Oscillations

Q.7 In regenerating feedback, the transfer function is given by

(a) $\frac{C(s)}{R(s)} = \frac{G(s)}{1 + G(s)H(s)}$

(b) $\frac{C(s)}{R(s)} = \frac{G(s)H(s)}{1 - G(s)H(s)}$

(c) $\frac{C(s)}{R(s)} = \frac{G(s)H(s)}{1 + G(s)H(s)}$

(d) $\frac{C(s)}{R(s)} = \frac{G(s)}{1 - G(s)H(s)}$

- Q.8** In a continuous data system
- (a) data may be a continuous function of time at all points in the system
 - (b) data is necessarily a continuous function of time at all points in the system
 - (c) data is continuous at the input and output parts of the system but not necessarily during intermediate processing of the data
 - (d) only the reference signal is a continuous function of time

- Q.9** The principle of homogeneity and superposition are applied to
- (a) linear time variant systems
 - (b) non-linear time variant systems
 - (c) linear time invariant systems
 - (d) non-linear time invariant systems

- Q.10** Consider the following statements regarding the advantages of closed loop negative feedback control systems over open-loop systems:

1. The overall reliability of the closed loop systems is more than that of open-loop system.
2. The transient response in the closed loop system decays more quickly than in open-loop system.
3. In an open-loop system, closing of the loop increases the overall gain of the system.
4. In the closed-loop system, the effect of variation of component parameters on its performance is reduced.

Of these statements

- (a) 1 and 3 are correct
- (b) 1, 2 and 4 are correct
- (c) 2 and 4 are correct
- (d) 3 and 4 are correct

- Q.11** Match **List-I** (Time function) with **List-II** (Laplace transforms) and select the correct answer using the codes given below lists:

List-I	List-II
A. $[af_1(t) + bf_2(t)]$	1. $aF_1(s) + bF_2(s)$
B. $[e^{-at}f(t)]$	2. $sF(s) + f(0)$
C. $\left[\frac{df(t)}{dt}\right]$	3. $\frac{1}{s}F(s)$

D. $\left[\int_0^t f(x) dx\right]$

4. $sF(s) - f(0^-)$

5. $F(s + a)$

Codes:

	A	B	C	D
(a)	5	2	3	4
(b)	1	5	4	3
(c)	2	1	3	4
(d)	1	5	3	4

- Q.12** If a system is represented by the differential

equation, is of the form $\frac{d^2y}{dt^2} + 6\frac{dy}{dt} + 9y = r(t)$

- (a) $k_1 e^{-t} + k_2 e^{-9t}$
- (b) $(k_1 + k_2) e^{-3t}$
- (c) $ke^{-3t} \sin(t + \phi)$
- (d) $te^{-3t} u(t)$

- Q.13** A linear system initially at rest, is subject to an input signal $r(t) = 1 - e^{-t} (t \geq 0)$. The response of the system for $t > 0$ is given by $c(t) = 1 - e^{-2t}$. The transfer function of the system is

- (a) $\frac{(s+2)}{(s+1)}$
- (b) $\frac{(s+1)}{(s+2)}$
- (c) $\frac{2(s+1)}{(s+2)}$
- (d) $\frac{(s+1)}{2(s+2)}$

Answer Key:

1. (d) 2. (c) 3. (b) 4. (a) 5. (d)
 6. (d) 7. (d) 8. (b) 9. (c) 10. (b)
 11. (b) 12. (d) 13. (c)



**Student's
Assignments**

2

Explanations

1. (d)

Redrawing the block diagram with $X_1(s) = 0$

