

POSTAL Book Package

2023

GATE • ESE

Electronics Engineering Objective Practice Sets

Signals and Systems

Contents

Sl. Topic	Page No.
1. Basics of Signals and Systems	2 - 11
2. Linear Time Invariant Systems	12 - 23
3. Continuous Time Fourier Series	24 - 31
4. Continuous Time Fourier Transform	32 - 40
5. Laplace Transform	41 - 51
6. Z-Transform	52 - 63
7. DTFS, DTFT, DFT and FFT	64 - 75
8. Sampling	76 - 80
9. Digital Filters and Miscellaneous	81 - 87



MADE EASY
Publications

Note: This book contains copyright subject matter to MADE EASY Publications, New Delhi. No part of this book may be reproduced, stored in a retrieval system or transmitted in any form or by any means. Violators are liable to be legally prosecuted.

Basics of Signals and Systems

MCQ and NAT Questions

- Q.1** If a function $f(t) u(t)$ is shifted to right side by t_0 , then the function can be expressed as
 (a) $f(t - t_0) u(t)$
 (b) $f(t) u(t - t_0)$
 (c) $f(t - t_0) u(t - t_0)$
 (d) $f(t + t_0) u(t + t_0)$
- Q.2** An impulse function consists, of
 (a) entire frequency range with same relative phase
 (b) infinite bandwidth with linear phase variations
 (c) pure d.c.
 (d) large d.c. along with weak harmonics.
- Q.3** If $a(n)$ is the response of a linear, time-invariant, discrete-time system to a unit step input, then the response of the same system to a unit impulse input is
 (a) $\frac{d}{dn}[a(n)]$
 (b) $na(n)$
 (c) $a(n) - a(n - 1)$
 (d) $a(n + 1) - 2a(n) + a(n - 1)$
- Q.4** The unit impulse response of a linear time invariant system is the unit step function $u(t)$. For $t > 0$, the response of the system to an excitation $e^{-at} u(t)$, $a > 0$ will be
 (a) ae^{-at} (b) $(1/a)(1 - e^{-at})$
 (c) $a(1 - e^{-at})$ (d) $1 - e^{-at}$
- Q.5** The unit step response of a system is given by $(1 - e^{-at}) u(t)$, the impulse response is given by
 (a) $e^{at} u(t)$ (b) $e^{-at} u(t)$
 (c) $\frac{1}{\alpha} e^{-\alpha t} u(t)$ (d) $\alpha e^{-\alpha t} u(t)$
- Q.6** A function $f(t)$ is an even function, if for all values of t
 (a) $f(t) = f(-t)$ (b) $f(t) = -f(-t)$
 (c) $f(t) = f(t + T/2)$ (d) $f(t) = -f(t + T/2)$
 (T is the time-period of the function)
- Q.7** The function $\delta(2n)$ is equal to
 (a) $\delta(n)$ (b) $\frac{1}{2}\delta(n)$
 (c) $2\delta(n)$ (d) $2\delta\left(\frac{n}{2}\right)$
- Q.8** If $x_1(t) = 2 \sin \pi t + \cos 4\pi t$ and $x_2(t) = \sin 5\pi t + 3 \sin 13\pi t$, then
 (a) $x_1(t)$ and $x_2(t)$ both are periodic.
 (b) $x_1(t)$ and $x_2(t)$ both are not periodic.
 (c) $x_1(t)$ is periodic, but $x_2(t)$ is not periodic.
 (d) $x_1(t)$ is not periodic, but $x_2(t)$ is periodic.
- Q.9** Energy signals are the signals with
 (a) $0 < E < \infty, P = 0$ (b) $0 < E < \infty, P = \infty$
 (c) $0 < P < \infty, E = \infty$ (d) $0 < P < \infty, E = 0$
- Q.10** Power signals are the signals with
 (a) $0 < E < \infty, P = 0$
 (b) $0 < E < \infty, P = \infty$
 (c) $0 < P < \infty, E = \infty$
 (d) $0 < P < \infty, E = 0$
- Q.11** A signum function is
 (a) zero for t greater than zero
 (b) zero of t less than zero
 (c) unity for t less than zero
 (d) $2 u(t) - 1$
- Q.12** The average value of the waveform $x(t) = 4 \cos 4t - 5 \sin 5t$ is
 (a) 0 (b) $-\left(\frac{2}{\pi}\right)$
 (c) $\frac{2}{\pi}$ (d) $\frac{20}{\pi}$
- Q.13** If two signals are given as,
 $x_1(t) = e^{jt}$ and $x_2(t) = e^{t(j+1)}$
 Then which one of the following statements is correct?
 (a) Both $x_1(t)$ and $x_2(t)$ are periodic
 (b) Only $x_1(t)$ is periodic
 (c) Only $x_2(t)$ is periodic
 (d) Neither $x_1(t)$ nor $x_2(t)$ is periodic

Multiple Select Questions (MSQs)

Q.41 For which of the following function(s) the time scaling operation will effect its original nature of the function:

- (a) $\delta(t)$
 (b) $u(t)$
 (c) $r(t)$
 (d) A rectangular pulse within finite duration.

Q.42 A discrete system with input $x[n]$ and output $y[n]$ are related by

$$y[n] = \sum_{n=-\infty}^{\infty} x[n]e^{-j\omega n}$$

The system is

- (a) unstable (b) stable
 (c) time variant (d) time invariant

Q.43 Consider a continuous time signal

$x(t) = 2\cos\left(\frac{\pi t}{4}\right) * \delta\left(\frac{t}{2} - 1\right)$. Then for which value of 't', signal $x(t)$ is zero.

- (a) $t = 0$ (b) $t = 2$
 (c) $t = 1$ (d) $t = 4$

Q.44 Consider a discrete-time periodic signal

$x[n] = \begin{cases} 1, & 0 \leq n \leq 7 \\ 0, & 8 \leq n \leq 9 \end{cases}$ with period of $N = 10$. A

function $y[n]$ is defined as $y[n] = x[n] - x[n-1]$, then the correct options regarding $y[n]$ are

- (a) period $N = 10$
 (b) period $N = 8$
 (c) $y[n] = \{1, 0, 0, 0, 0, 0, 0, -1, 0\}$ for one time period
 (d) $y[n] = \{1, 0, 0, 0, 0, 0, -1, 0\}$ for one time period



Answers Basics of Signals and Systems

- | | | | | | | |
|------------|------------|----------|---------|-------------|---------------|------------|
| 1. (c) | 2. (a) | 3. (c) | 4. (b) | 5. (d) | 6. (a) | 7. (a) |
| 8. (a) | 9. (a) | 10. (c) | 11. (d) | 12. (a) | 13. (b) | 14. (c) |
| 15. (a) | 16. (d) | 17. (d) | 18. (a) | 19. (d) | 20. (c) | 21. (a) |
| 22. (b) | 23. (a) | 24. (b) | 25. (b) | 26. (b) | 27. (b) | 28. (d) |
| 29. (a) | 30. (a) | 31. (c) | 32. (a) | 33. (-2) | 34. (8) | 35. (4) |
| 36. (2) | 37. (4) | 38. (24) | 39. (0) | 40. (0.232) | 41. (a, c, d) | 42. (b, c) |
| 43. (a, d) | 44. (a, c) | | | | | |

Explanations Basics of Signals and Systems


1. (c)

Since $f(t)u(t) = f(t)$ for $t > 0$ also we know $u(t-t_0) = 1$, for $t > t_0$

Here in right side shifting that means $t_0 > 0$
 \therefore by property on shifting right side,

$$f(t)u(t) = \xrightarrow[\text{shifting RHS by } t_0]{\text{on}} f(t-t_0)u(t-t_0)$$

2. (a)

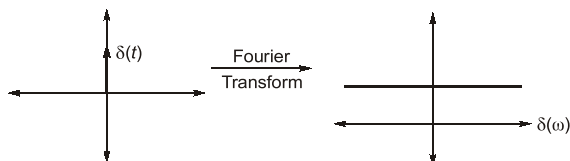

3. (c)

For discrete time system,

$$d(n) = u(n) - u(n-1)$$

For continuous time system,

$$\delta(t) = \frac{d}{dt}u(t)$$

4. (b)

Since, for unit impulse, response is unit step i.e. transfer function is integrator.

$$\begin{aligned} \therefore y(t) &= \int_{-\infty}^t e^{-at} u(t) dt; u(t) = \begin{cases} 1, & t > 0 \\ 0, & \text{elsewhere} \end{cases} \\ &= \int_0^t e^{-at} dt = \frac{1}{a}(1 - e^{-at}) \end{aligned}$$

5. (d)

$$\delta(t) = \frac{d}{dt}u(t)$$

$$\text{Impulse response} = \frac{d}{dt}((1 - e^{-\alpha t})u(t))$$

$$= \frac{d}{dt}(u(t) - u(t)e^{-\alpha t})$$

$$= \delta(t) - \delta(t)e^{-\alpha t} + \alpha e^{-\alpha t} u(t)$$

$$\therefore f(t) \delta(t) = f(0) \delta(t)$$

$$\therefore \text{Impulse response} = \alpha e^{-\alpha t} u(t)$$

6. (a)

For even function, $f(t) = f(-t)$

For odd function, $f(t) = -f(-t)$

7. (a)

Properties :

For continuous system

$$\delta(at) = \frac{1}{|a|} \delta(t)$$

For discrete system

$$\delta[an] = \delta[n]$$

8. (a)

$$x_1(t) = 2\sin\pi t + \cos 4\pi t$$

$$\therefore \omega_1 = \frac{\pi}{1}$$

$$\omega_2 = \frac{4\pi}{1}$$

$$\omega_0 = \text{HCF}(\omega_1, \omega_2)$$

$$= \text{HCF}\left(\frac{\pi}{1}, \frac{4\pi}{1}\right) = \pi$$

$$\therefore T = \frac{2\pi}{\omega_0} = \frac{2\pi}{\pi} = 2$$

$$x_2(t) = \sin 5\pi t + 3 \sin 13\pi t$$

$$\omega_1 = \frac{5\pi}{1}; \quad \omega_2 = \frac{13\pi}{1}$$

$$\omega_0 = \text{HFC}(5\pi, 13\pi)$$

$$\omega_0 = \pi$$

$$\therefore T = \frac{2\pi}{\omega_0} = \frac{2\pi}{\pi} = 2$$

\therefore Both are periodic.

9. (a)


Energy signal: $E \neq \infty, P = 0$,
where E is energy and P is average power.

10. (c)

Power signal : $E = \infty, P \neq \infty$

11. (d)

Signum function is



$$2u(t) - 1 = \begin{cases} 1, & t > 0 \\ -1, & t < 0 \end{cases}$$

$$u(t) = 1, \quad t > 0$$

$$= 0, \quad \text{elsewhere}$$

12. (a)

The collective signal is periodic with period

$$= \text{LCM}\left(\frac{\pi}{2}, \frac{2\pi}{5}\right) = 2\pi.$$

Average value of a sinusoidal signal = 0.

$$V_{\text{avg.}} = \frac{1}{T} \int_0^T (v_1(t) + v_2(t)) dt$$

$$= \frac{1}{T} \int_0^T v_1(t) dt + \frac{1}{T} \int_0^T v_2(t) dt$$

$$= V_{\text{avg}_1} + V_{\text{avg}_2} = 0$$

13. (b)

Only complex exponential are periodic.

$$x_2(t) = e^{t(j+1)} = e^{jt} e^t$$

(because of this term $x_2(t)$ is non-periodic)

14. (c)

If a continuous time signal can take on any value in the continuous interval $(-\infty, \infty)$ then this signal is known as analog signal.

15. (a)

For the given $f(t)$

