

# POSTAL Book Package

# 2023

## CIVIL ENGINEERING

### Structural Analysis

Conventional Practice Sets		<i>Contents</i>
Sl.	Topic	Page No.
1.	ILD & Rolling Loads and Determinacy .....	2
2.	Arches .....	22
3.	Method of Indeterminate Analysis .....	36
4.	Trusses .....	127
5.	Matrix Methods of Structural Analysis .....	172
6.	Structural Dynamics and Cables .....	181





**MADE EASY**  
Publications

**Note:** This book contains copyright subject matter to MADE EASY Publications Pvt. Ltd., New Delhi. No part of this book may be reproduced, stored in a retrieval system or transmitted in any form or by any means. Violators are liable to be legally prosecuted.

# ILD & Rolling Loads and Determinacy

- Q1** (i) What do you understand by static indeterminacy and kinematic indeterminacy of a 2-D framed structure? Explain with an example of a fixed end beam.
- (ii) The degree of static indeterminacy of the rigid frame having two internal hinges as shown in the figure below is
- (iii) Consider the frame shown in the figure given below.



If the axial and shear deformations in different members of the frame are assumed to be negligible, then what would be the reduction in the kinematic indeterminacy.

### Solution:

- (i) **Static indeterminacy ( $D_S$ ):** Those structures which cannot be analysed by using condition of static equilibrium alone are called indeterminate structures. To analyse these indeterminate structures extra equilibrium condition are required, called compatibility conditions and numbers of compatibility conditions needed to analyse structure is known as degree of static indeterminacy.

$D_S = \text{Total no. of reactions present (Both internal and external)} - \text{No. of available equilibrium equations.}$

**For 2-D Rigid Frame:** In two dimensional rigid member, each member has three internal reactions (viz.  $R_x$ ,  $R_y$  and  $M_z$ ) and at each joint three equilibrium conditions (viz.  $\Sigma F_x = 0$ ,  $\Sigma F_y = 0$  and  $\Sigma M_x = 0$ ) are available

Let there are  $r_e$  number of external support conditions.

$\therefore$  Total no. of reaction present,

$R = \text{External reaction} + \text{Internal reaction}$

$$R = r_e + 3m$$

and total no. of available equilibrium conditions,

$$E = 3j$$

$\therefore$

$$D_S = R - E$$

$$D_S = r_e + 3m - 3j$$

$$D_S = r_e + 3m - 3j - r_r$$

where  $r_r$  = Number of released reactions


... when all joint are rigid

... when some joints are hybrid

**Example:**

Here,

$$\begin{aligned} r_e &= 3 + 1 = 4 \\ m &= 1 \\ j &= 2 \\ D_s &= r_e + 3m - 3j \\ &= 4 + 3 \times 1 - 3 \times 2 \\ &= 1 \text{ (indeterminate to 1st degree)} \end{aligned}$$

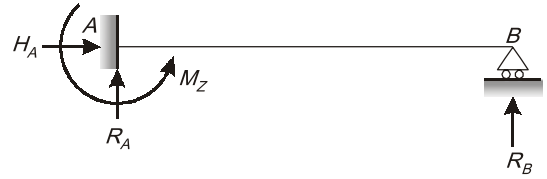

**Kinematic Indeterminacy ( $D_k$ ):** It refers to the total no. of available degree of freedom at all joints.

It is equal to total no. of unrestrained displacement component at all joints.

$D_k$  = Total degree of freedom at all joints – degree of freedom restrained by supports

**2-D Rigid Frames:** At each joint there are three degree of freedom (viz.  $\Delta_x$ ,  $\Delta_y$  and  $\theta_z$ ). Hence at all joint there will be  $3j$  degree of freedoms. But at supports displacements are not available in the direction of reaction component.

$$\begin{aligned} \therefore D_k &= \text{unrestrained displacement component} \\ \Rightarrow D_k &= 3j - r_e \quad \dots \text{members are axially flexible} \\ D_k &= 3j - r_e - m'' \quad \dots m'' \text{ member are axially rigid} \end{aligned}$$

**Example:**

$$\begin{aligned} D_k &= 3j - r_e \\ \text{Here, } j &= 2, r_e = 3 \\ \therefore D_k &= 3 \times 2 - 3 \\ \Rightarrow D_k &= 3 \text{ (i.e., } \theta_B, \Delta_{HB} \text{ \& } \Delta_{VB}) \end{aligned}$$



**(ii) Method-I: (By Formula)**

The degree of **static indeterminacy** for a rigid hybrid frame is given by ,


$$\begin{aligned} D_s &= 3m + r_e - r_r - 3(j + j') \\ \text{Where, } m &= \text{total number of members} = 9 \\ r_e &= \text{total number of external reactions} \\ &= 2 + 1 + 1 = 4 \\ r_r &= \text{total number of released reactions at hybrid joint} \\ &= \Sigma(m_j - 1) = (2 - 1) + (2 - 1) = 2 \\ j &= \text{total number of rigid joints} = 6 \\ j' &= \text{total number of hybrid joints} = 2 \\ \therefore D_s &= (3 \times 9) + 4 - 2 - 3(6 + 2) \\ &= 27 + 4 - 2 - 24 = 31 - 26 = 5 \end{aligned}$$

**Method-II: (By Loop Method)**

$$\begin{aligned} D_{si} &= 3C - r_r \\ &= 3 \times 2 - 2 = 4 \\ D_{se} &= r_e - 3 = 1 \\ D_s &= D_{si} + D_{se} = 4 + 1 = 5 \end{aligned}$$

where  $C$  = no. of closed loops

**Method-III:**

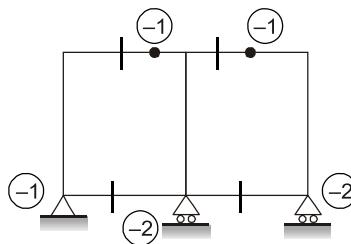

$$D_s = 3 \times \text{Number of cuts to open-closed loops}$$

$$- \text{Reaction added to make stable cantilevers}$$

 $\Rightarrow$ 

$$D_s = (3 \times 4) - 1 - 1 - 2 - 2 = 5$$

(iii)  $D_k$  (when inextensible) =  $D_k$  (when extensible) – Number of axially rigid members.


$$\Rightarrow D_k(\text{when extensible}) - D_k(\text{when inextensible})$$

$$= \text{Number of axially rigid members}$$

$$= 6$$

**Key Point:**

DOF of joints is shown below.



$$D_k(\text{when extensible}) = 3 + 3 + 3 + 1 + 1 = 14$$

$$D_k(\text{when inextensible}) = 14 - 6 = 8$$


**Note:** Reduction in  $D_k = 6(\theta_A, \theta_B, \theta_C, \theta_D, \theta_E, \theta_F)$ .

## Q2 Define influence line.

**Solution:**

**Influence line:** Influence line is a representation of variation of stress functions like support reactions, shear force, bending moment at particular cross-section when concentrated unit load moves over span of a structure such as beam, girder, arch or truss from one end to another end. It is used to analyse the effect of moving loads on the structure. It can also be determined using Muller-Breslau principle.

**Example:**

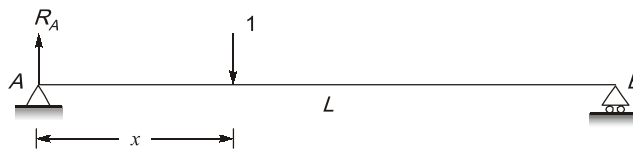


For a simply supported beam, influence line of vertical reactions at 'A', can be found out using unit load at a distance 'x'.

For which  $R_A = \frac{L-x}{L} = 1 - \frac{x}{L}$


Now, At A,  $x = 0$ ;  $\therefore R_A = 1 - 0 = 1$

And at B,  $x = L$ ,  $\therefore R_A = 1 - 1 = 0$

ILD for  $R_A$

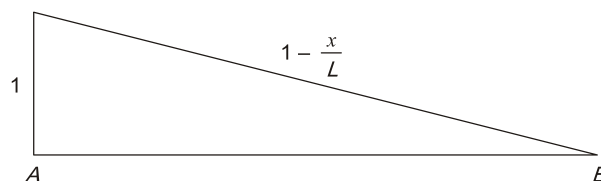


**Q3** State Muller Breslau principle. Derive the equation for influence line for the reaction  $R_B$  for the beams shown in the figure.  $EI$  is constant throughout.




**Solution:**

**Muller Breslau Principle:** "The ILD for any stress function in a structure is represented by its deflected shape obtained by removing the restraint offered by the stress function (SF, BM and reaction) and introducing a directly generalized unit displacement in the positive direction of that stress function".

Assume unit load travels from A, now unit load is at  $x$  distance from A

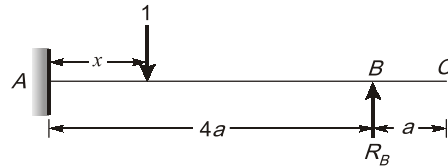


**Case (i)  $0 \leq x \leq 4a$**

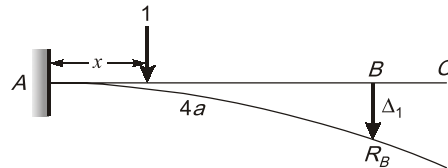

$$\Delta_1 = \frac{1 \cdot x^3}{3EI} + \frac{1 \cdot x^2}{2EI} (4a - x)$$

Where  $\Delta_1$  is deflection at B due to unit load.

$$\Delta_2 = \frac{R_B (4a)^3}{3EI} = \frac{64R_B a^3}{3EI}$$

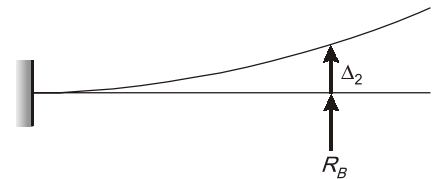

Where  $\Delta_2$  is deflection at B due to reaction  $R_B$ .

Since joint B is hinged, hence net deflection is zero

$$\Delta_1 = \Delta_2$$

$$\frac{x^3}{3EI} + \frac{x^2 (4a - x)}{2EI} = \frac{64R_B a^3}{3EI}$$


$$R_B = \frac{3EI}{64a^3} \left[ \frac{x^3}{3EI} + \frac{2ax^2}{EI} - \frac{x^3}{2EI} \right]$$


$$= \frac{3EI}{64a^3} \left[ \frac{2ax^2}{EI} - \frac{x^3}{6EI} \right] = \frac{3x^2}{32a^2} - \frac{1}{128} \frac{x^3}{a^3}$$

$$R_B = \frac{x^2 (12a - x)}{128a^3}$$

(when  $0 \leq x \leq 4a$ )

**Case (ii)  $4a \leq x \leq 5a$**

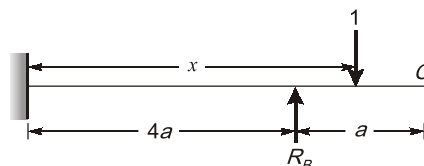

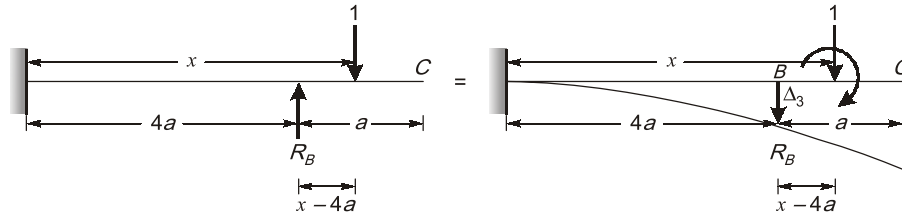

Deflection at B due to unit load at x is same as the deflection at x due to point load at B.

∴

$$\Delta_3 = \frac{1 \cdot (4a)^3}{3EI} + \frac{(4a)^2 (x - 4a) \cdot 1}{2EI}$$

When  $\Delta_3$  is the deflection at B due to unit load.

$$\Delta_4 = \frac{R_B (4a)^3}{3EI} = \frac{64R_B a^3}{3EI}$$

When  $\Delta_4$  is the deflection at B due to reaction  $R_B$ .

Since joint B is hinged, hence net deflection is zero.

$$\Delta_3 = \Delta_4$$

$$\frac{1 \cdot (4a)^3}{3EI} + \frac{1 \cdot (x - 4a)(4a)^2}{2EI} = \frac{64R_B a^3}{3EI}$$


$$R_B = \frac{3EI}{64a^3} \left[ \frac{64a^3}{3EI} + \frac{16a^2 (x - 4a)}{2EI} \right] = 1 + \frac{3EI \times 16a^2 (x - 4a)}{64a^2 \times 2EI}$$

$$= 1 + \frac{3}{8a} (x - 4a) = 1 + \frac{3x}{8a} - \frac{3}{2}$$

$$R_B = \frac{3x}{8a} - 0.5$$


when  $4a \leq x \leq 5a$

**Q4** A beam ABC as shown in below figure is fixed at A and is simply supported at B. Draw the qualitative diagram for influence line of vertical reaction at A.



**Solution:**

Case-I: When unit load lies between A and B (i.e.  $0 \leq x \leq L$ )

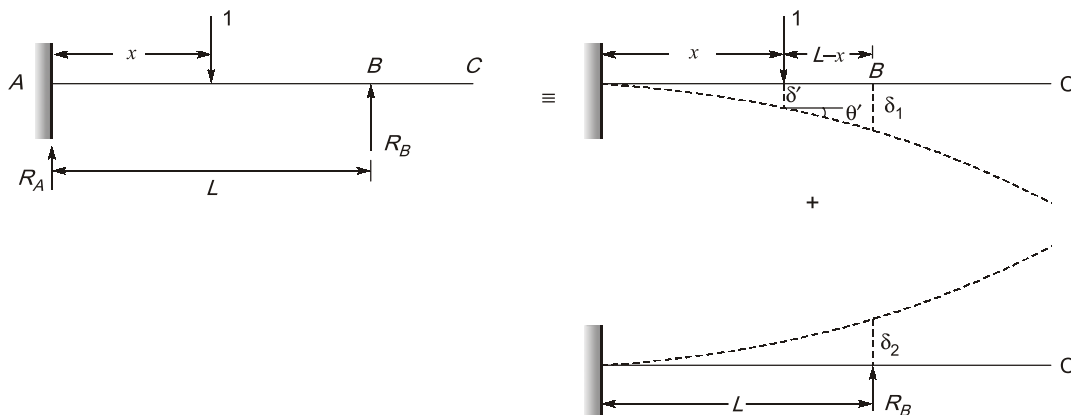

From unit load method:

$$\delta_1 = \delta' + \theta'(L - x)$$

$$= \frac{1 \cdot x^3}{3EI} + \frac{1 \cdot x^2}{2EI}(L - x) = \frac{x^2(3L - x)}{6EI}$$

$$\delta_2 = R_B \frac{L^3}{3EI}$$

$$\delta_B = \delta_1 - \delta_2 = 0$$

$\Rightarrow$

$$\delta_1 = \delta_2$$

$\Rightarrow$

$$R_B \frac{L^3}{3EI} = \frac{x^2(3L - x)}{6EI}$$

$\Rightarrow$

$$R_B = \frac{x^2(3L - x)}{2EI}$$

$\therefore$

$$R_A = 1 - R_B$$

$$(\because \Sigma F_y = 0, \Rightarrow R_A + R_B = 1)$$

$$= \left\{ 1 - \frac{x^2(3L - x)}{2L^3} \right\}$$

...(Cubic)

$$\frac{\partial R_A}{\partial x} = \frac{-2x(3L) - 3x^2}{2L^3}$$

$$= \frac{-3x(2L - x)}{2L^3} < 0$$

...(decreasing slope)

Hence, ILD for  $R_A$  between A and B is cubic with a decreasing slope.


And at A,  $x = 0 \Rightarrow$

$$R_A = 1$$

And at B,  $x = L \Rightarrow$

$$R_A = 1 - \frac{L^2(3L - L)}{2L^3} = 0$$

**Case-II : When unit load lies between B and C ( $L \leq x \leq 1.5 L$ )**

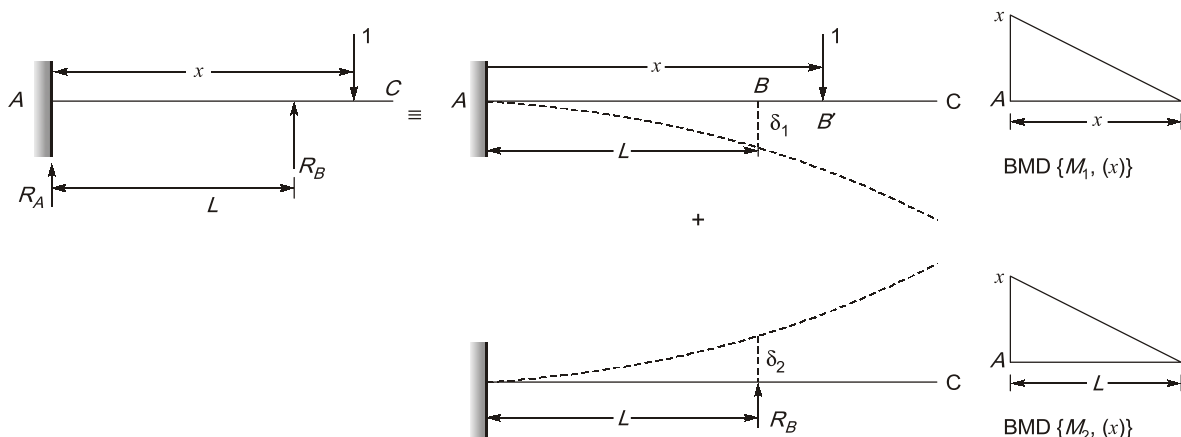

$\delta_1$  calculations:

By area moment method

$$= \left( \frac{1}{2} \times L \times \frac{L}{EI} \right) \times 1 \cdot \left( x - \frac{L}{3} \right) = \frac{L^2(3x - L)}{6EI}$$